


**Modular Cooking Range Line  
EVO700 4 Zone Electric  
Infrared Cooking Top Range**

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_

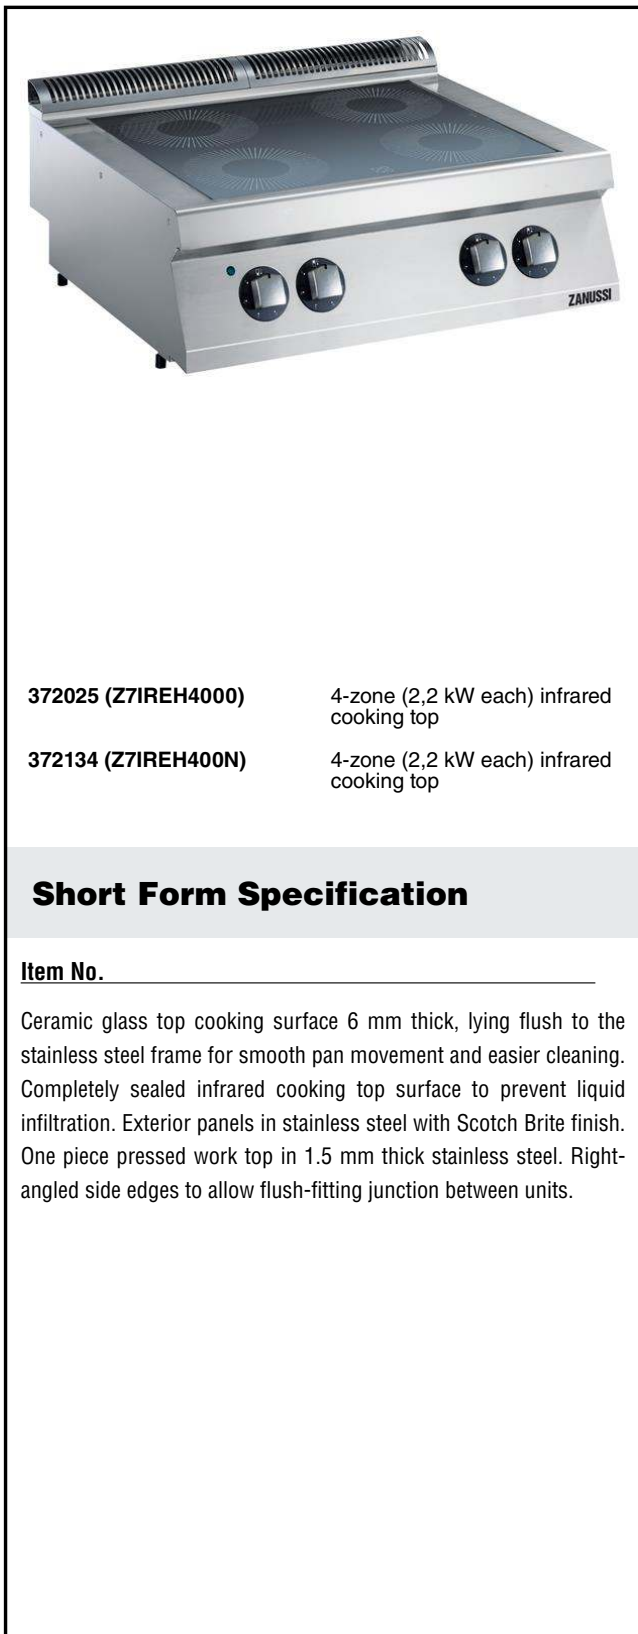

372025 (Z7IREH4000) 4-zone (2,2 kW each) infrared cooking top  
372134 (Z7IREH400N) 4-zone (2,2 kW each) infrared cooking top

**Short Form Specification**

**Item No.** \_\_\_\_\_  
Ceramic glass top cooking surface 6 mm thick, lying flush to the stainless steel frame for smooth pan movement and easier cleaning. Completely sealed infrared cooking top surface to prevent liquid infiltration. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

**Main Features**

- Ceramic glass top cooking surface with 4 infrared heating zones 6 mm thick.
- The circular concentric heating sections measuring 230 mm give uniform heat also to the largest pan.
- The cooking top is sealed to prevent infiltration inside the unit.
- Warning light to indicate residual surface heat.
- Immediate heat transfer from cooking top to pan.
- Low heat dissipation to the kitchen.
- Energy regulation of each zone.
- Heating via ultra high powered heating elements.
- The smooth glass-ceramic surface can be quickly and easily cleaned, thus providing maximum hygiene.
- IPx4 water protection.

**Construction**

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

**Optional Accessories**

- Junction sealing kit  PNC 206086
- Support for bridge type installation, 800 mm  PNC 206137
- Support for bridge type installation, 1000 mm  PNC 206138
- Support for bridge type installation, 1200 mm  PNC 206139
- Support for bridge type installation, 1400 mm  PNC 206140
- Support for bridge type installation, 1600 mm  PNC 206141
- Frontal handrail 800 mm  PNC 206167
- Large handrail (portioning shelf) 800 mm  PNC 206186
- Frontal handrail 1200 mm  PNC 206191
- Frontal handrail 1600 mm  PNC 206192
- Right and left side handrails  PNC 206240
- Water column with swivel arm (water column extension not included)  PNC 206289
- Water column extension  PNC 206291
- Chimney upstand, 800 mm  PNC 206304
- 2 side covering panels, height 250 mm, depth 700 mm  PNC 206320

APPROVAL: \_\_\_\_\_



## Modular Cooking Range Line EVO700 4 Zone Electric Infrared Cooking Top Range

- Chimney grid net, 400mm

PNC 206400 □




**Modular Cooking Range Line  
EVO700 4 Zone Electric Infrared Cooking Top Range**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.


2021.01.20

## Modular Cooking Range Line EVO700 4 Zone Electric Infrared Cooking Top Range

**Front**

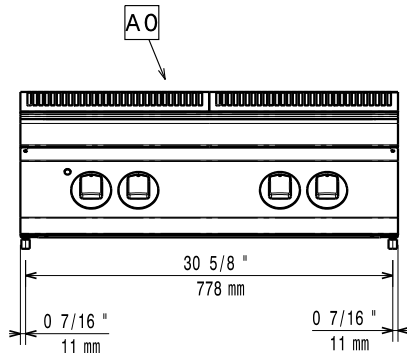


**Side**

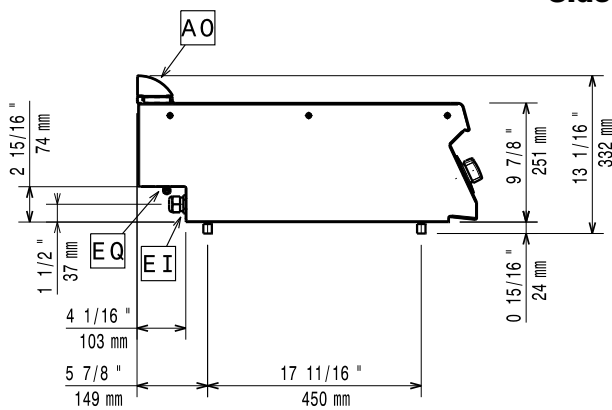

EI = Electrical inlet (power)  
EQ = Equipotential screw

**Top**

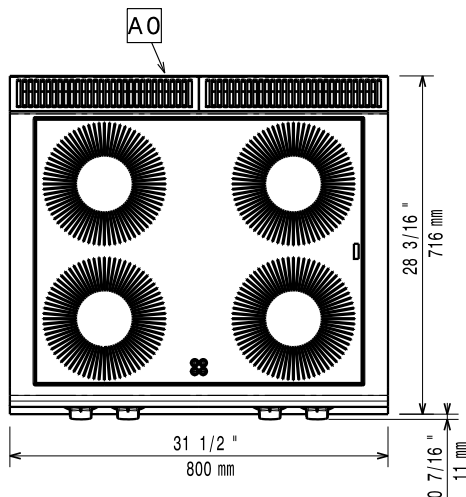

### Electric

**Supply voltage:**

372025 (Z7IREH4000)	380-400 V/3N ph/50/60 Hz
372134 (Z7IREH400N)	230 V/3 ph/50/60 Hz

**Total Watts:**

8.8 kW

**Predisposed for:**

372025 (Z7IREH4000)	380-400V 3N~ 50/60Hz 7,4-8,8kW
---------------------	-----------------------------------

### Key Information:

<b>Front Plates Power:</b>	2.2 - 2.2 kW
<b>Back Plates Power:</b>	2.2 - 2.2 kW
<b>Front Plates dimensions:</b>	Ø 230 Ø 230
<b>Back Plates dimensions:</b>	Ø 230 Ø 230
<b>Net weight:</b>	35 kg
<b>Shipping weight:</b>	
372025 (Z7IREH4000)	41 kg
372134 (Z7IREH400N)	50 kg
<b>Shipping height:</b>	
372025 (Z7IREH4000)	520 mm
372134 (Z7IREH400N)	540 mm
<b>Shipping width:</b>	
372025 (Z7IREH4000)	820 mm
372134 (Z7IREH400N)	830 mm
<b>Shipping depth:</b>	
372025 (Z7IREH4000)	860 mm
372134 (Z7IREH400N)	850 mm
<b>Shipping volume:</b>	
372025 (Z7IREH4000)	0.37 m <sup>3</sup>
372134 (Z7IREH400N)	0.38 m <sup>3</sup>

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

**Certification group:**

372025 (Z7IREH4000)	N7CIE
372134 (Z7IREH400N)	NIR78